
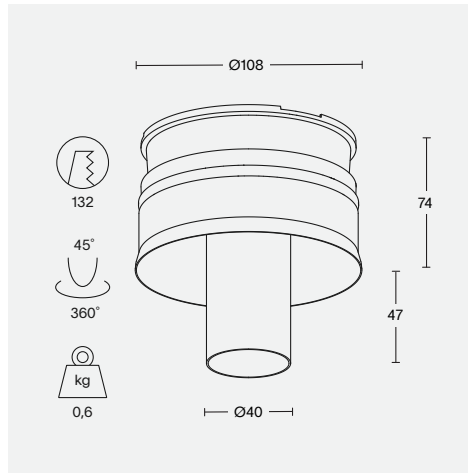


light only mini

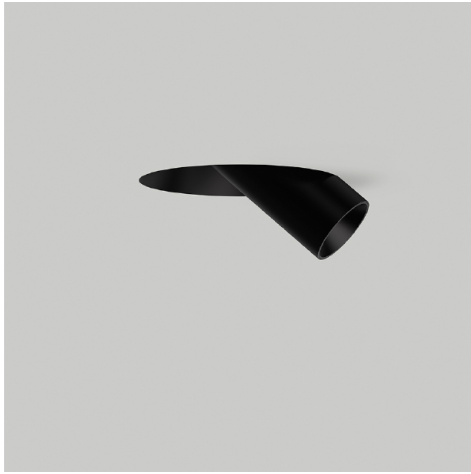

light specs

lamp	LED
optic	lens
driver	excluded
IP	20
CRI	90+ / 97
class	III

accessories

installation

8000 - 0001	plaster ring Ø108
8000 - 0011	clt csc ring Ø108

drivers

8000 - 0021	DALI dimmable driver 45W
8000 - 0022	1-10V dimmable driver 36W
8000 - 0023	non-dimmable driver 42W
8000 - 0026	DALI dimmable driver 60W
8000 - 0027	DALI deep dim driver 20W

luminaire output

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
350mA (5.7W)	425 lm	525 lm	525 lm	525 lm	450 lm	550 lm	550 lm	550 lm
500mA (8.5W)		710 lm	710 lm	710 lm		750 lm	750 lm	750 lm
700mA (12.8W)			950 lm				1000 lm	

order number

	2700K				3000K			
	10°	20°	40°	60°	10°	20°	40°	60°
black ano.	8000-2346	8000-1796	8000-1419	8000-2540	8000-2347	8000-1797	8000-1420	8000-2541
white struc.	8000-2348	8000-1800	8000-1423	8000-2544	8000-2349	8000-1801	8000-1424	8000-2545