


light + motion | trim


installation instruction

1




cut a round hole (Ø 68)
consult the chosen luminaire tech specs for required height and free air dimensions

2

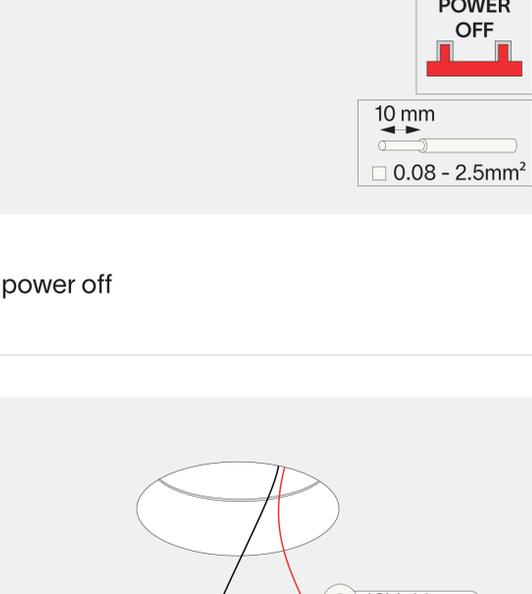


turn the power off

3

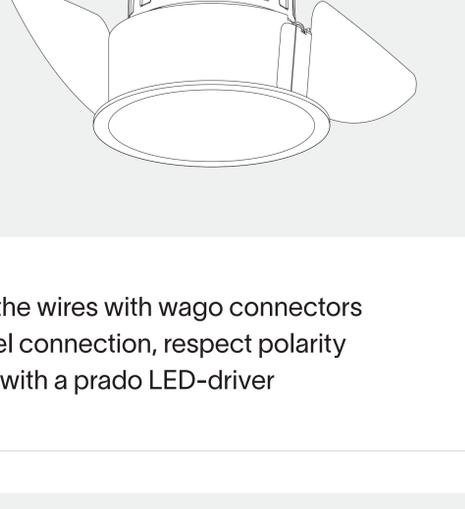

connect the wires with wago connectors for parallel connection, respect polarity
combine with a prado LED-driver

4

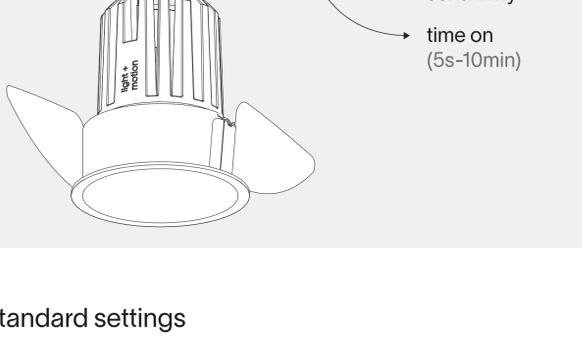


standard settings
- ambient light: 1700 LSB
- sensitivity: no pets detectable
- time on: 5min

if desired update standard settings with a screwdriver



T = short time on	T = long time on
S = low sensitivity	S = high sensitivity
L = low ambient light	L = high ambient light

5

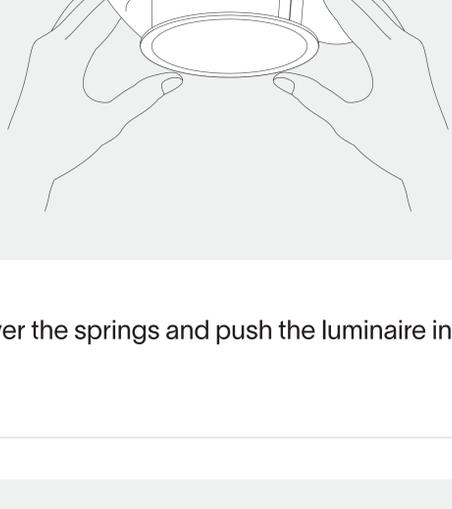


bend over the springs and push the luminaire into the ceiling

6

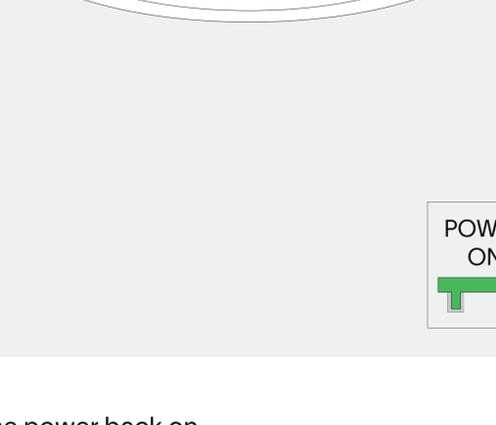

turn the power back on

7

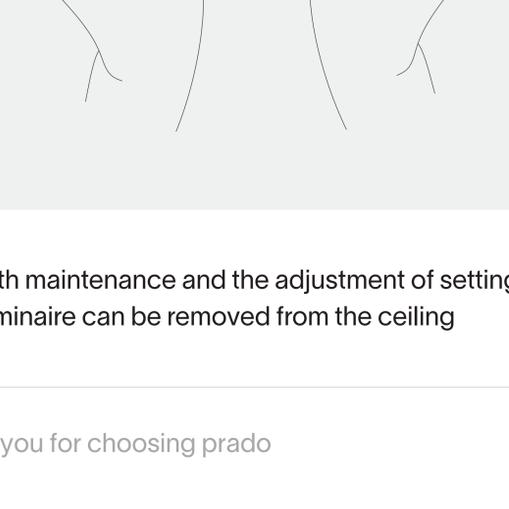

for both maintenance and the adjustment of settings, the luminaire can be removed from the ceiling

thank you for choosing prado



prado.eu

The light source or electronics in this fixture shall only be replaced by the manufacturer. Warranty will not apply in case of wrongful use or if unskilled personnel attempts to repair the product.