


retrofit socket type G

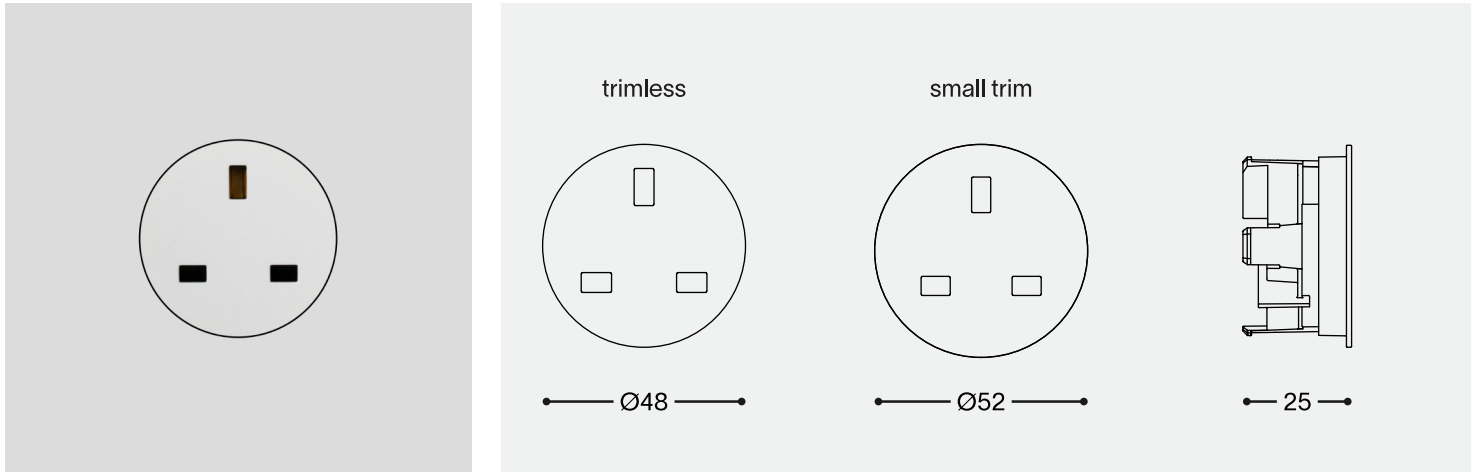

socket specs

application	13A/250V
flush-mounting depth	25 mm
number of gangs	1
back box depth	minimum 25 mm recommended ≥ 35 mm
wire fixation	screw terminals (TX8)
IP, IK rating	IP20 IK06
marking	CE - UKCA - BS1363
earth terminal	yes
switched	no
other	patent pending

accessories

installation

8800 - 2018	retrofit plaster ring short
8800 - 2010	removal tool

order number

socket without cover	cover plate (not incl.)		
retrofit	black	trimless	small trim
8800 - 5032	black	8800 - 5035	8800 - 5038
	cream	8800 - 5034	8800 - 5037
	white	8800 - 5033	8800 - 5036